

# A5060 SlimLine™ CP RAIN (UHF) RFID ANTENNA

#### **ABOUT TIMES-7**

We are a high-tech company specializing in the design and manufacture of RAIN (UHF) RFID antennas. Founded in 2006, Times-7 has developed the largest portfolio of fixed RAIN RFID reader antennas. Based in Lower Hutt, New Zealand we export all over the world through an authorized network.

Times-7 antennas are famous for their quality and performance.

In addition to our world-class products and in-depth expertise, our customers appreciate Times-7's customer service and technical support.

We are responsive in supporting a large global customer base and ensuring the success of our customer's implementations.

Times-7 Research Ltd 10 Te Puni Street Lower Hutt 5012 New Zealand

NEW ZEALAND P: +64 4 974 6566

USA/CANADA P: +1 408 769 5025

E: sales@times-7.com

www.times-7.com





High Gain, up to 10m / 33 ft. read range

Multi-element array, ideal for reflective environments

The A5060 multi-purpose antenna

An exciting new addition to the SlimLine<sup>™</sup> range of multi-purpose antennas, the A5060 is a circular polarized high gain antenna with an ultra-low profile, offering a read range of up to 10 m / 33 ft.

The A5060 is designed with a multi-element array to avoid distortion for maximum readability in a highly reflective and densely populated tag environment. This makes the A5060 ideal for industrial portal applications.

Its standard physical size (600 mm x 300 mm / 2' x 1') allows the A5060 to be readily mounted behind ceiling tiles, in cabinets or to cover large bench tops.

The A5060 can be either flush mounted using the six integrated mounting holes or VESA mounted using the Times-7 Mounting Plate.

# Ordering Information

Ordering Information (please quote product code, band / cable type & part no.)

| The state of the s |                   |                       |
|--|-------------------|-----------------------|
| *Antenna Product Code  | Band              | Part No.              |
| A5060  | ETSI 865-868 MHz  | 71876                 |
| A5060  | FCC 902-928 MHz   | 71875                 |
| Mounting Accessories Product Code  |                   | Part No.              |
| Mounting Plate (A5060)   | ETSI and FCC      | 72095                 |
| Cable Accessories Product code   | Cable Type        | Part No.              |
| Cable 2 m, SMA to RPTNC  | T7195 / 240 / 400 | 71436 / 71782 / 72042 |
| Cable 4 m, SMA to RPTNC  | T7 240 / 400      | 71784 / 72043         |
| Cable 6 m, SMA to RPTNC  | T7 240 / 400      | 71904 / 72044         |
| Cable 8 m, SMA to RPTNC  | T7 240 / 400      | 71788 / 72045         |

<sup>\*</sup>ROHS & CE compliant.

View the Times-7 Cable Accessory datasheet here



# Specifications

Physical / Environmental Specifications

| Pnysical/ Environmental Specifications |  |  |
|--|--|--|
| Dimensions unboxed:                    | 600 mm x 300 mm x 9 mm                           |  |
| Length (x) x Width (y) x Depth (z)     | 1.96" x 0.98" x 0.34"                            |  |
| Boxed unit dimensions:                 | 650 mm x 360 mm x 30 mm                          |  |
| (LxWxD)                                | 2.13" x 1.18" x 1.18"                            |  |
| Weight:                                | Net: 1.48 kg / 3.3 lbs. Gross: 1.79 kg / 3.9 lbs |  |
| Radome Material:                       | Fire retardant ABS                               |  |
| Environmental Rating:                  | IP54   |  |
| Operating / Storage Temperature:       | -20° to +55°C /-30° to +60°C                     |  |
|  | -4° to +131°F / -22° to +140°F                   |  |
| Mounting:                              | Integrated flush mounting holes or VESA mount    |  |
| Connectortype / position:              | SMA female side fly lead                         |  |
| Cable type/ length:                    | RG316 / 270 mm / 10.6"                           |  |

# **Electrical Specifications**

| Frequency Range:           | 865-868 MHz (ETSI) / 902-928 MHz (FCC) |  |
|----------------------------|--|--|
| Polarisation:              | RHCP (Right Hand Circular Polarized)   |  |
| Far-field Gain:            | 10.5 dBiC typical                      |  |
| Far-field 3dB beamwidth: * | 25° in XZ-plane, 60° in YZ-plane       |  |
| VSWR:                      | 1.4 typical                            |  |
| Front to back ratio:       | -25 dB                                 |  |
| Axial Ratio:               | 2 dB typical                           |  |
| Nominal Impedance:         | 50 Ω                                   |  |
| Anti-static protection:    | Yes, DC grounded                       |  |
| Antenna Detection:         | 10 K Ω resistance                      |  |
| Maximum Input Power:       | 3 W                                    |  |

## Radiation Pattern

# A5060 XZ Plane A5060 YZ

## **Azimuth Planes**






## Mounting Information

#### Flush mount

The A5060 antenna has 7 pre-drilled mounting holes on the rear side, which can be drilled fully through without damaging the antenna. For further instructions please click <a href="here">here</a>.

#### **Bracket mount**

The Times-7 Mounting Plate for the A5060 is designed to support VESA brackets. Each mounting plate comes with a screw kit. For instructions on how to attach the bracket to the antenna please click here.

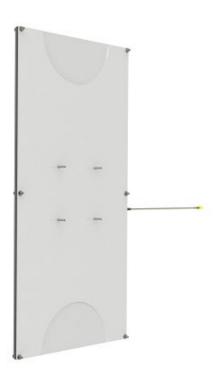

#### Installation Instructions


- Ensure that only finger tightness is used for the SMA connector. Use of tools to tighten the connector will
  apply excessive force and will damage the connector.
- Avoid any load or bending force from the cable on the connector.



## **Applications**

#### Industrial Portal

The IP54 rating and the 10.5 dBiC gain makes this antenna highly suitable for industrial applications. A densely packed asset with numerous tags can be identified accurately with almost no effort. A standalone portal can be realized with four A5060 antennas (see pictures) All possible tag orientations will be captured due to the A5060's circular polarization and A5060 antennas' locations. The antennas on the sides are offset such that the antennas do not face each other and induce maximum coverage within the portal. Almost all assets can be tracked with greater accuracy using our A5060 antenna.



The vertical configuration is recommended for high density asset tracking (such as palatized boxes, trolley of laundry goods, etc) where you will need a larger RF zone to efficiently read all the tagged items. The RF read window is expanded in and out of the portal.



The horizontal configuration is recommended to avoid the stray reads due to an expanded read window. The read zone/area is restricted within the width of the portal. Assets that are not densely packed can be read efficiently using this configuration.

#### Laundry Applications

With its high gain, the A5060 antenna has the potential to read through densely packed laundry items. The antennas can either be configured as a standalone industrial portal to track trolleys full of laundry goods or can be used in a conveyor to track movement. The antenna's confined RF emission eliminates stray tag reads. The antennas can also be used over the bench tops in packing/folding stations.





# A5060 SlimLine™ CP RAIN (UHF) RFID ANTENNA

#### **GLOBAL SUPPORT**

In addition to our world-class products and in-depth expertise, Times-7 is known for their quality of customer service and technical support. We place emphasis on our responsiveness in supporting a large global customer base and ensuring the success of our customer's implementations.

## Vehicle Tolling/Vehicle Access Control

The A5060' 10.5 dBiC gain is powerful enough to read vehicular tags, e.g., embedded in the windscreen or the number plate, from greater distances. The 25° narrow beam can be used to create confined zones for each lane.



#### Tool Tracking

Datasheet v5.0

The A5060 antenna is a good choice to track tools in a tool cabinetry. Highly reflective metallic environments are a challenge for traditional RFID antennas. A5060 is a multi-element antenna by design hence it is less affected by metallic assets and just need to be in the line of sight of the antenna to be read efficiently. The tools will have to be typically tagged using 'on-metal' tags.



#### Warehouse Shelving Application

The A5060's footprint fits both metric and imperial shelves. The slim antenna offers a snug fit inside the shelf without engulfing a lot of useful space. The multi-element antenna design keeps the antenna's beam active in every nook and corner. Assets in the shelves can be monitored in real-time with great accuracy.



Times-7 Research Ltd 10 Te Puni Street Lower Hutt 5012 New Zealand

> NEW ZEALAND P: +64 4 974 6566

USA/CANADA P: +1 408 769 5025

E: sales@times-7.com

www.times-7.com

The technical data contained in this publication is not a guarantee for which Times-7 Research Ltd assumes legal accountability. It is indicative of typical performance, and if required should be relied on for specific applications only after due verification.

All technical data, specifications and other information contained herein are deemed to be the proprietary intellectual property of Times-7 Research Ltd. No reproduction, copy or use thereof may be made without the express written consent of Times-7 Research Ltd.

Times-7, and the stylized T-7 Antennas logo are trademarks or registered trademarks of Times-7 Research Ltd. All other trademarks are the property of their respective

owners.
© 2022 Times-7 Research Ltd. All rights reserved. Specifications are subject to change without notice.

## **Mechanical Drawing for the A5060**



